

MyPBX - Embedded Hybrid IP-PBX for Small Businesses

MyPBX is a standalone embedded hybrid PBX for small businesses and remote branch offices of larger organizations (2-100 users per site). MyPBX also offers a hybrid solution (a combination of VoIP applications using legacy telecom equipment) alternative for enterprises who are not yet ready to migrate to a complete VoIP solution.



MyPBX



Specifications

Up to 16 Analog Ports
 Support for a Combination of FXO and FXS Modules
 Echo Cancellation
 256 MB Onboard Flash
 128 MB Onboard RAM
 2 Ethernet Ports
 LED: Red for FXO & Green for FXS
 Protocol: SIP(RFC3261), *T.38(RFC3362)
 DTMF: RFC2833, SIP INFO, In-band
 Codec: G.711 A/u-law, G.726, G.729 A/B, GSM, Speex
 Unlimited SIP trunk & Extension
 Dial plan
 BLF Status Updates



Size:280x175x33mm
 Weight:700g
 Power:12V,5A



Environment Conditions

Operation Range: 0°to 50°C, 32° to 122° F
 Storage Range: -20° to 65°C, 4° to 149° F
 Humidity: 10-90% non-condensing

Features

Automated Attendant (IVR)
 Blind Transfer
 Call Detail Records(CDR)
 Call Forward
 Call Parking
 Call Pickup
 Call Routing
 Call Transfer
 Call Waiting
 Call Recording
 Caller ID
 Conference Call
 Direct Inward System Access(DISA)
 Do Not Disturb(DND)
 Music On Hold
 Music On Transfer
 Ring Group
 Route by Caller ID
 Three-way Calling
 Voicemail
 Blacklist
 Followme

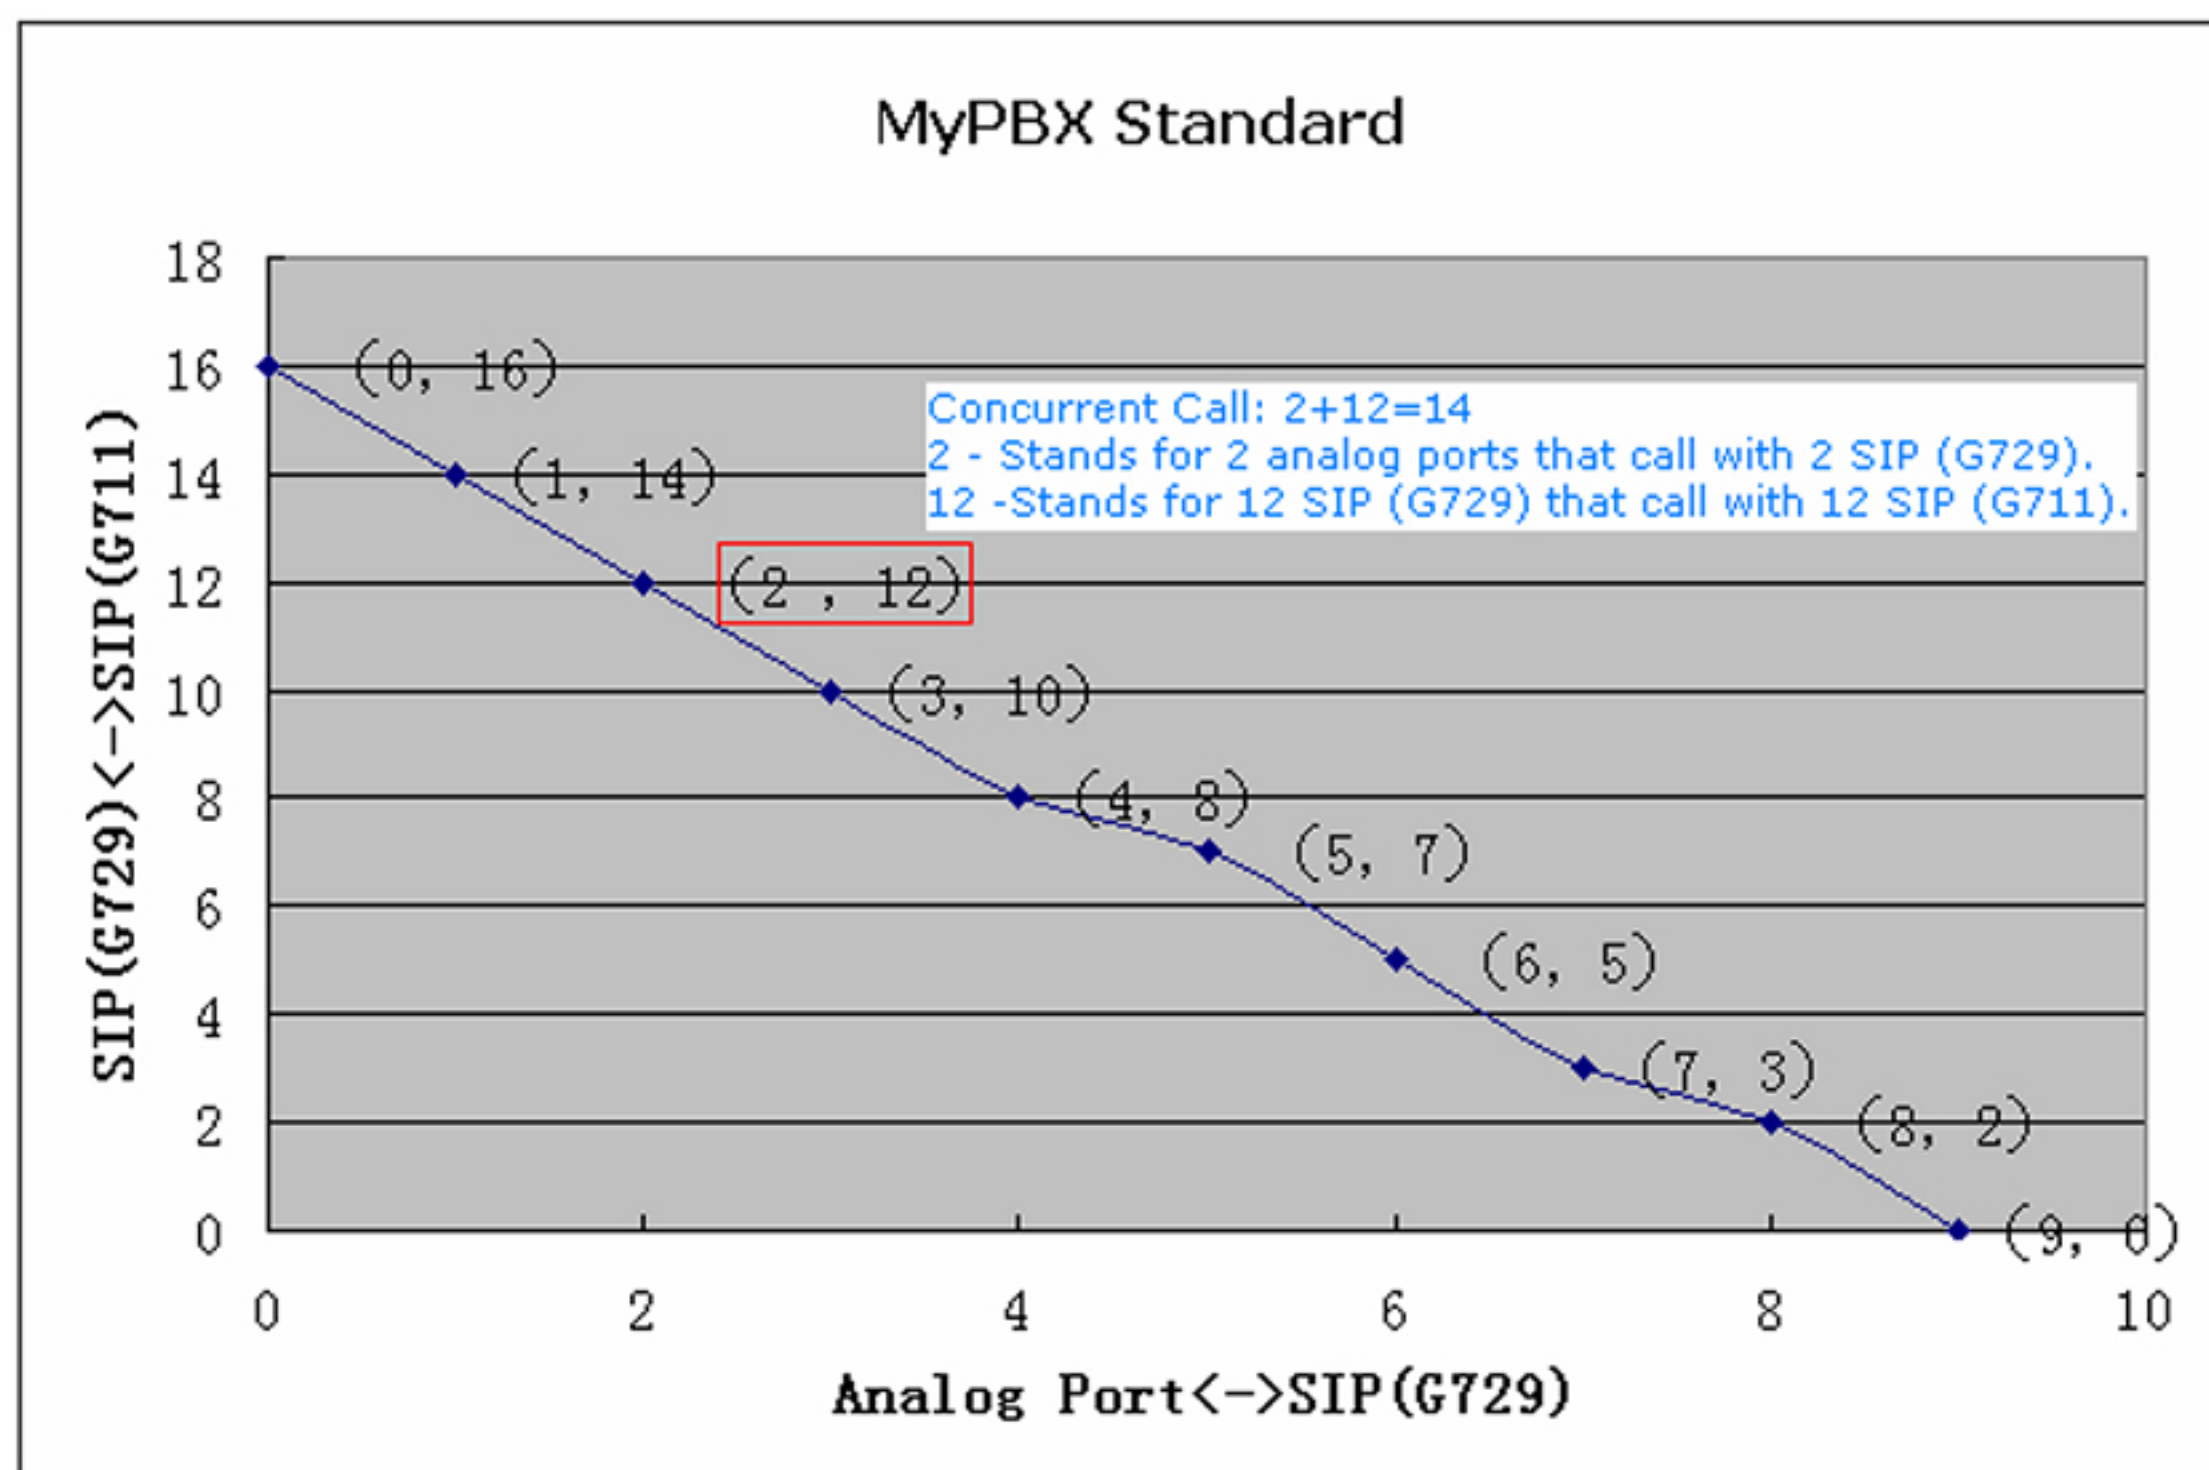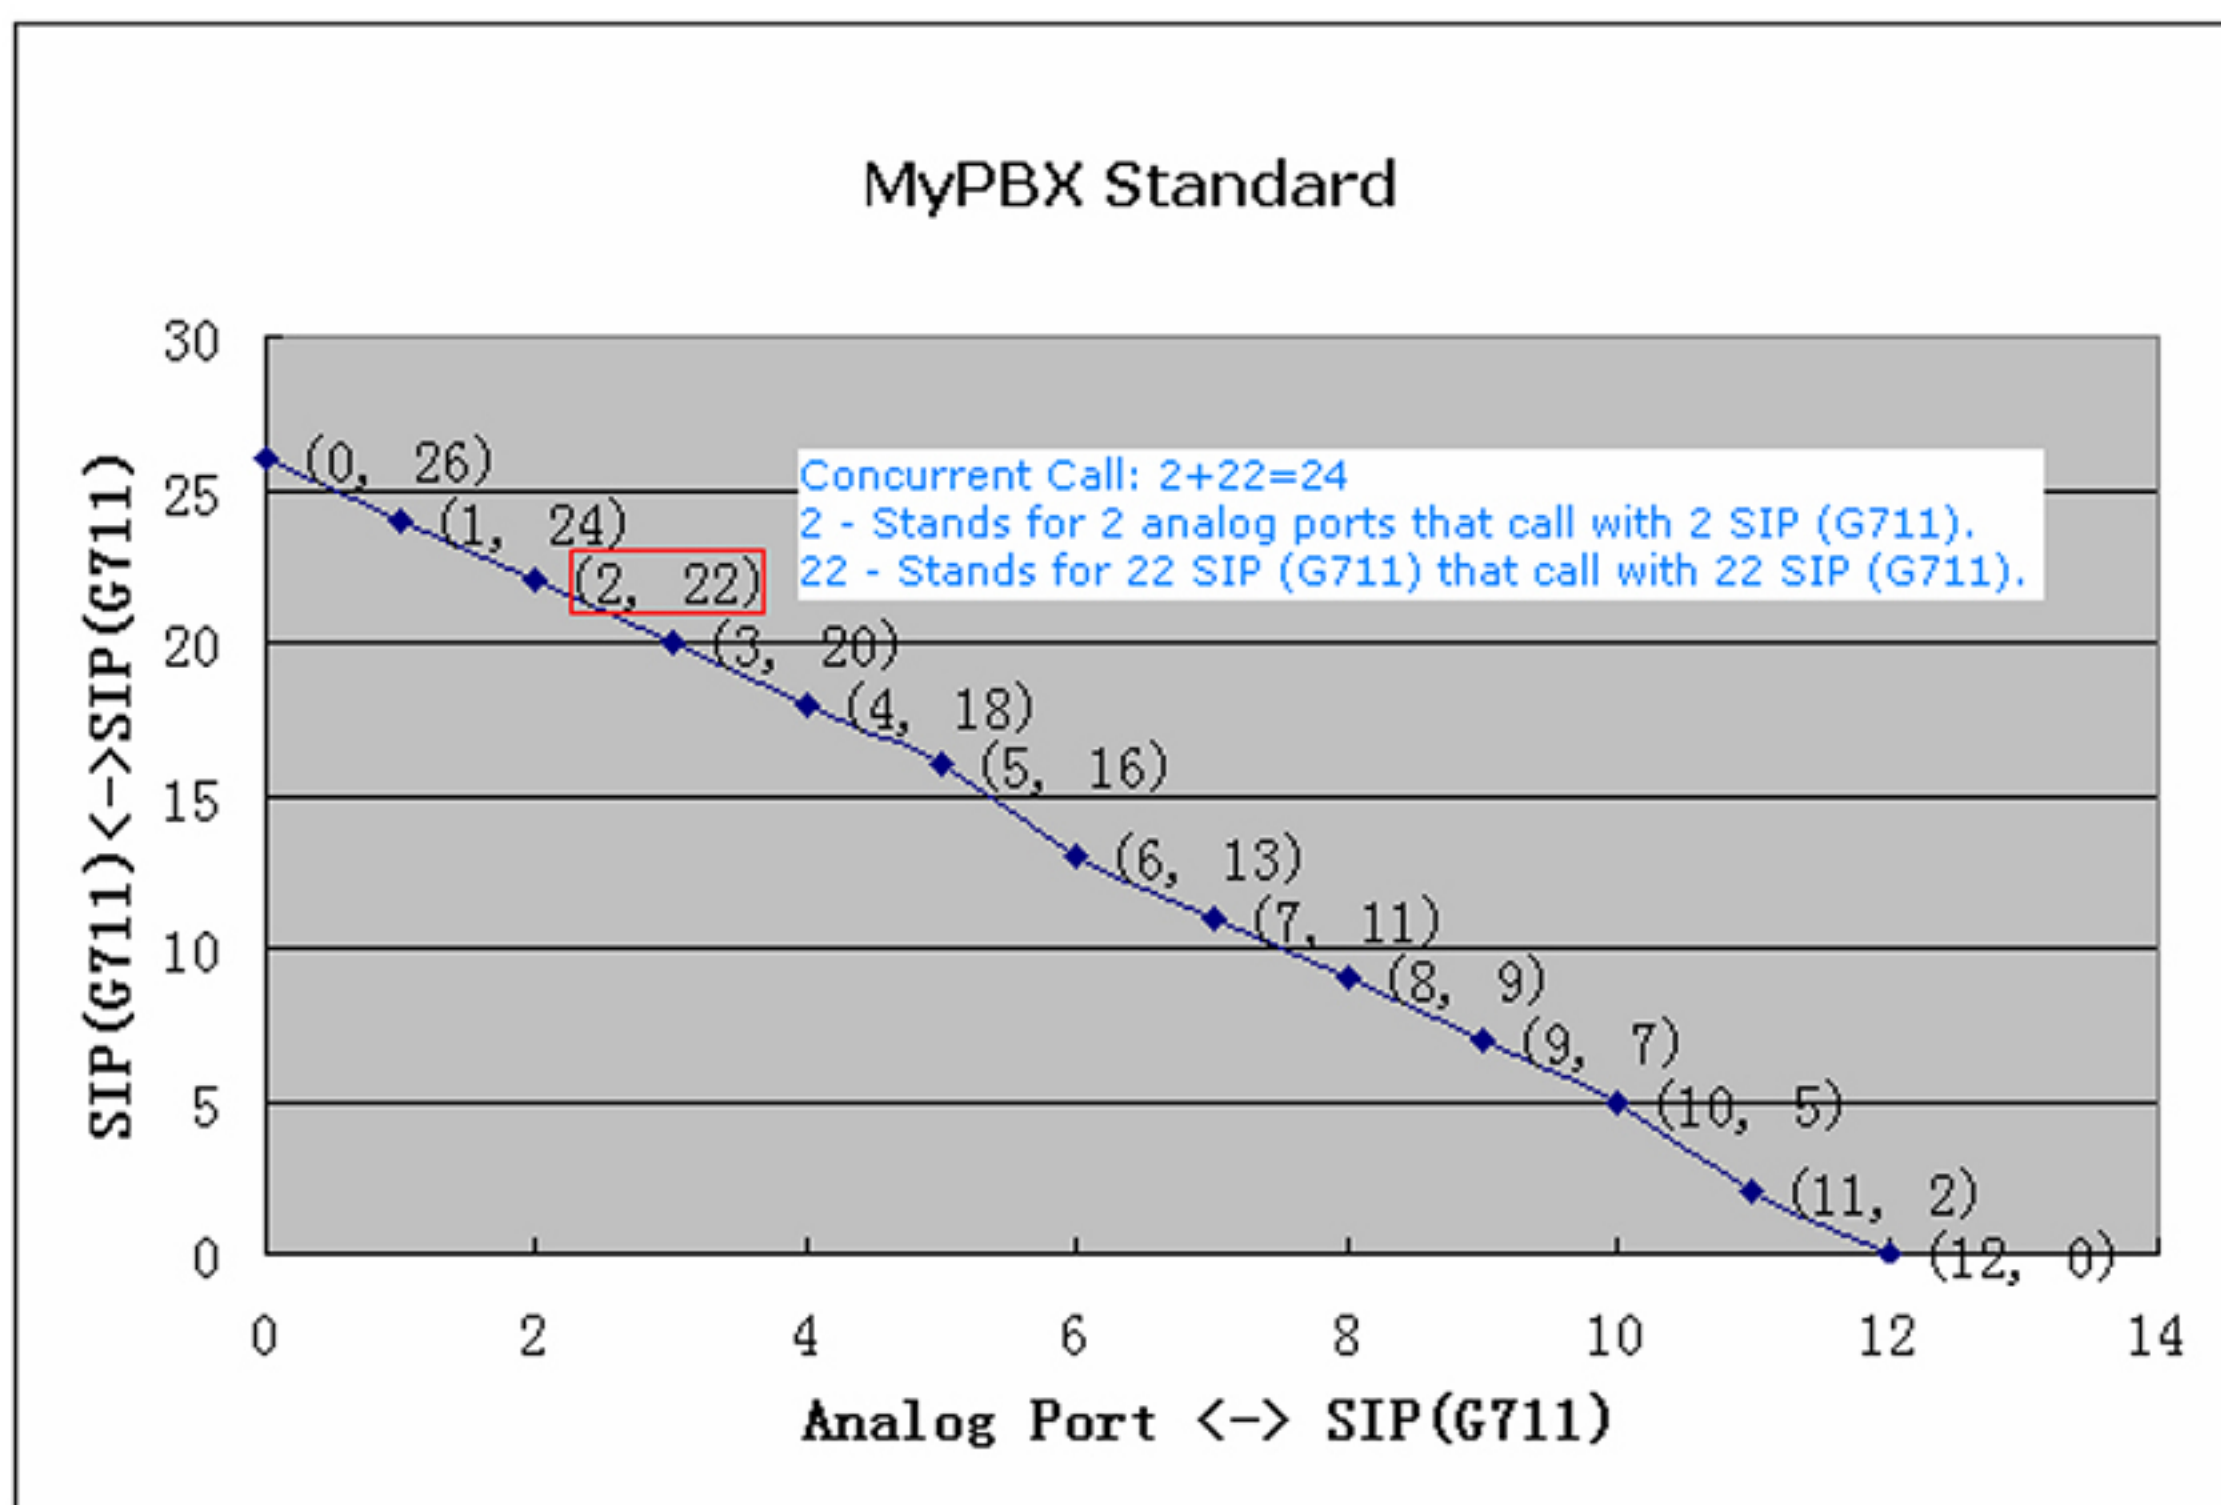Concurrent Call:

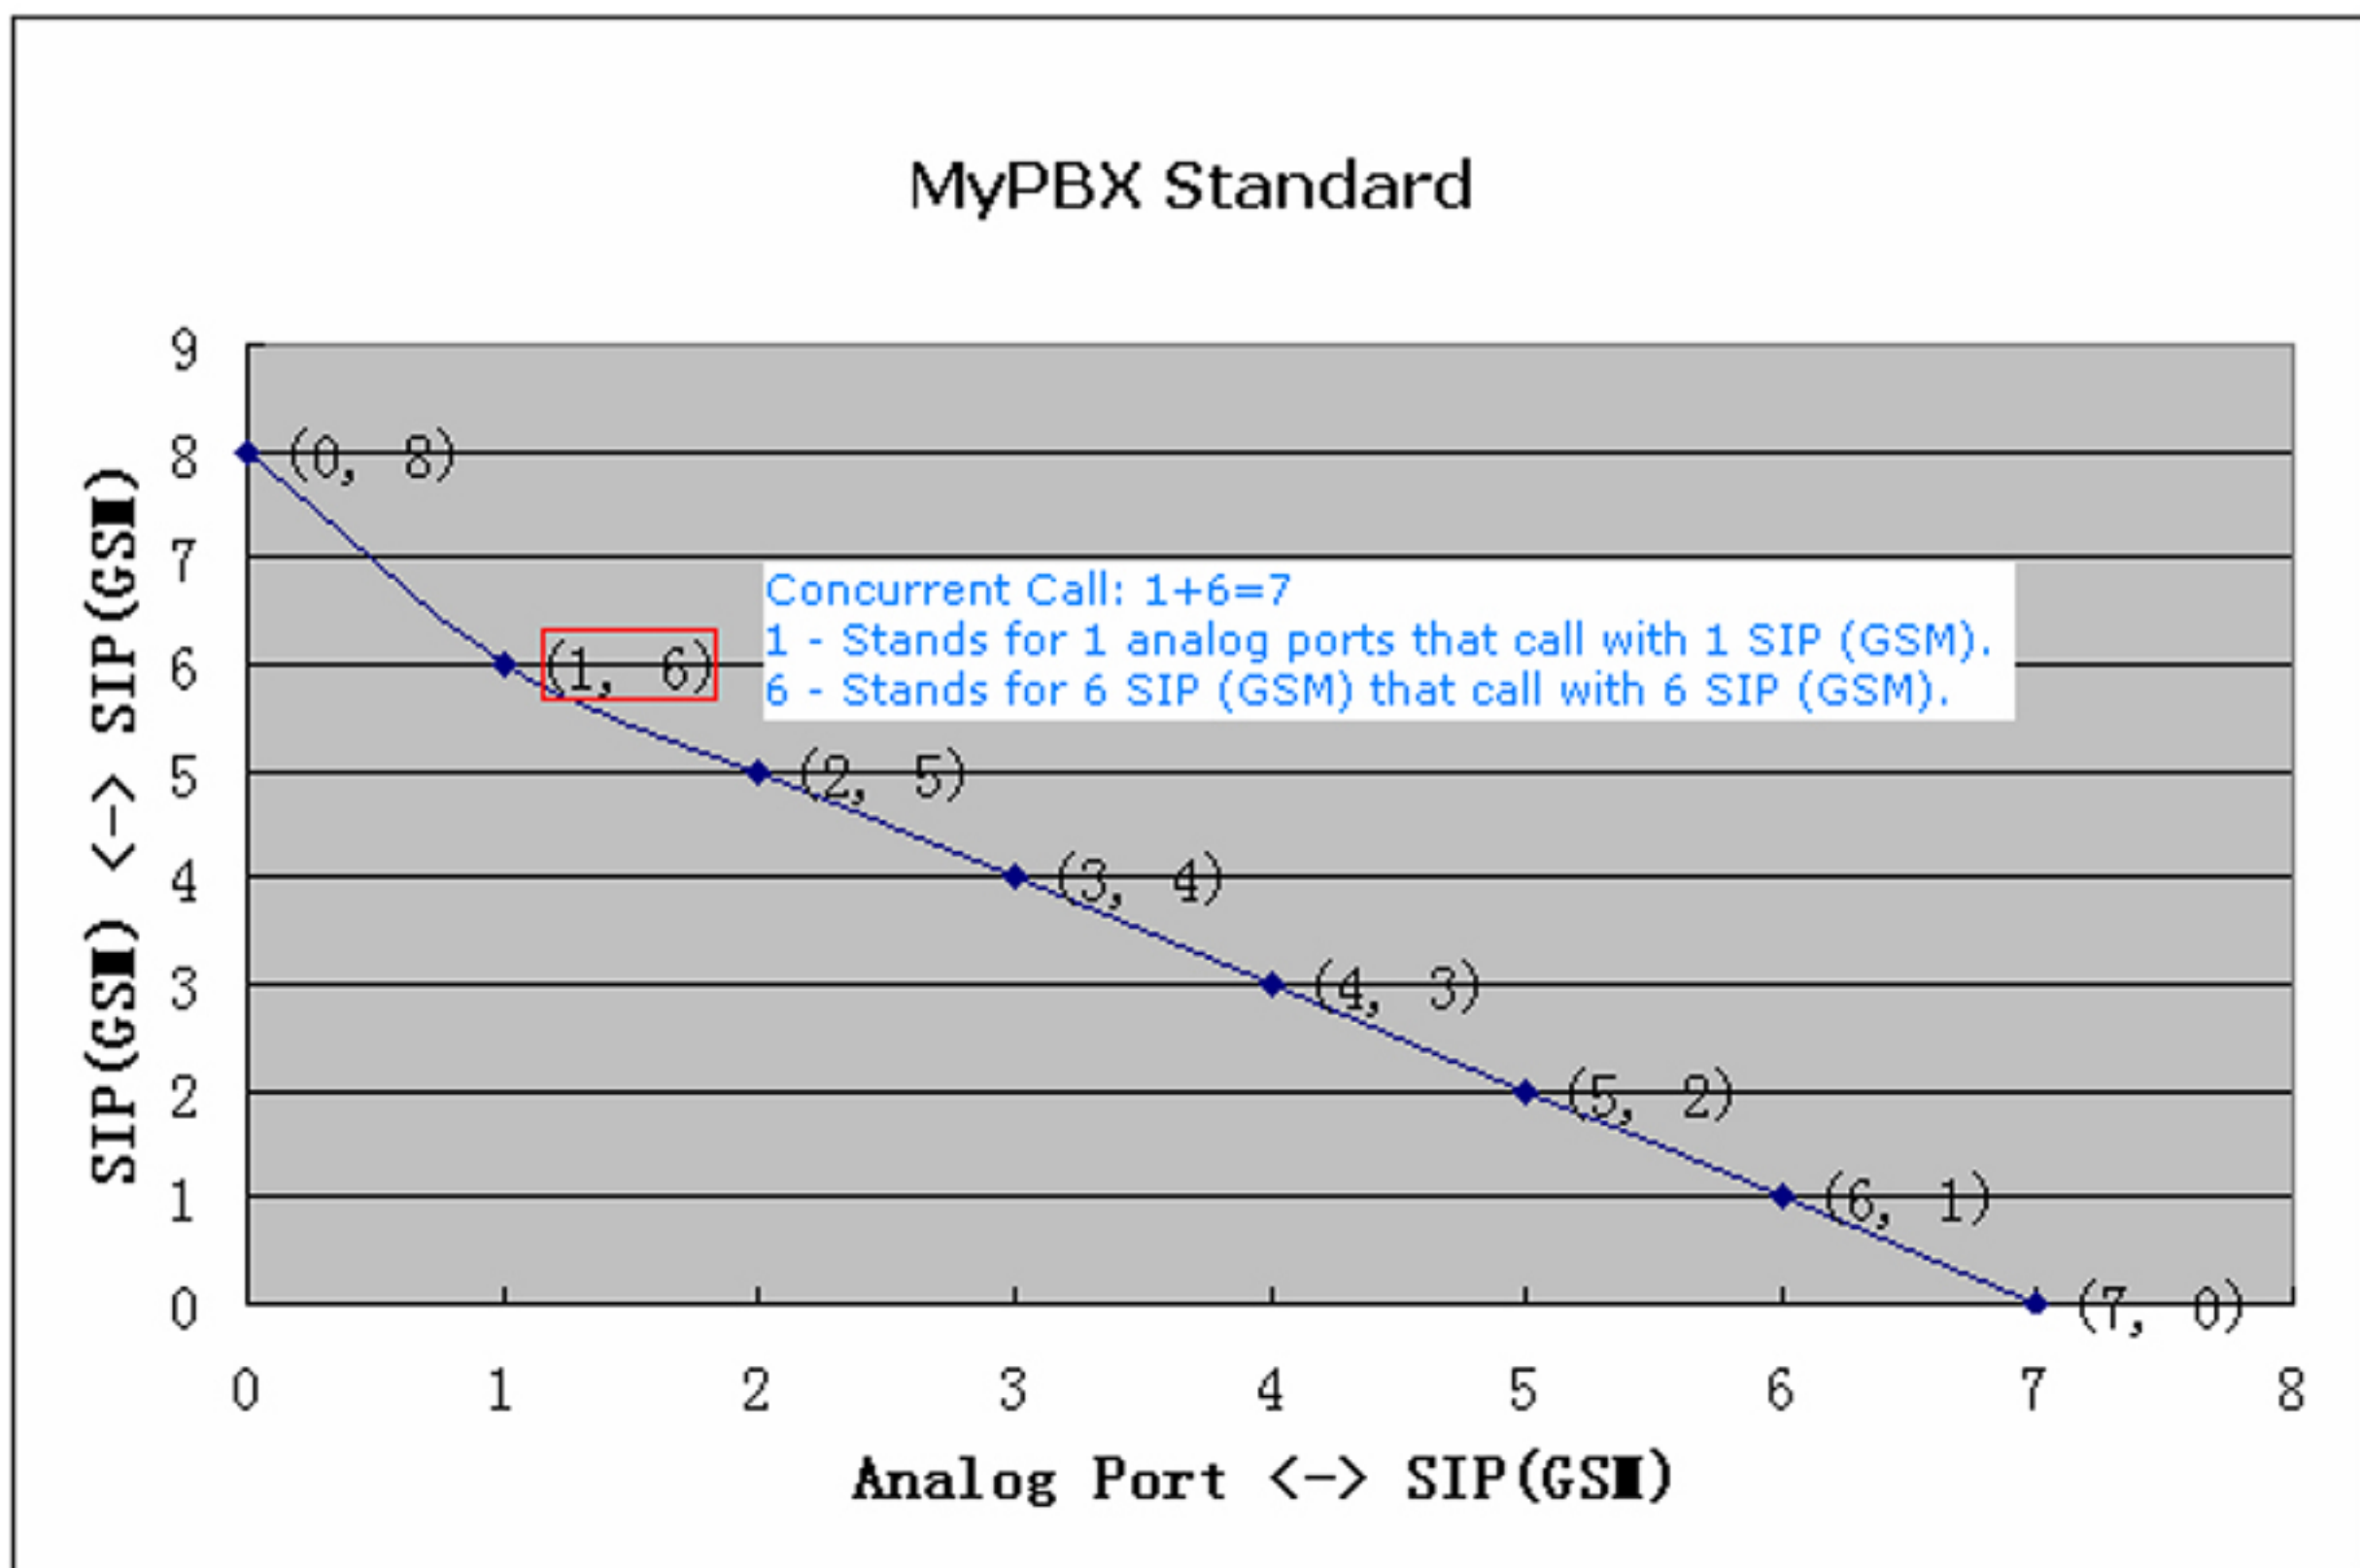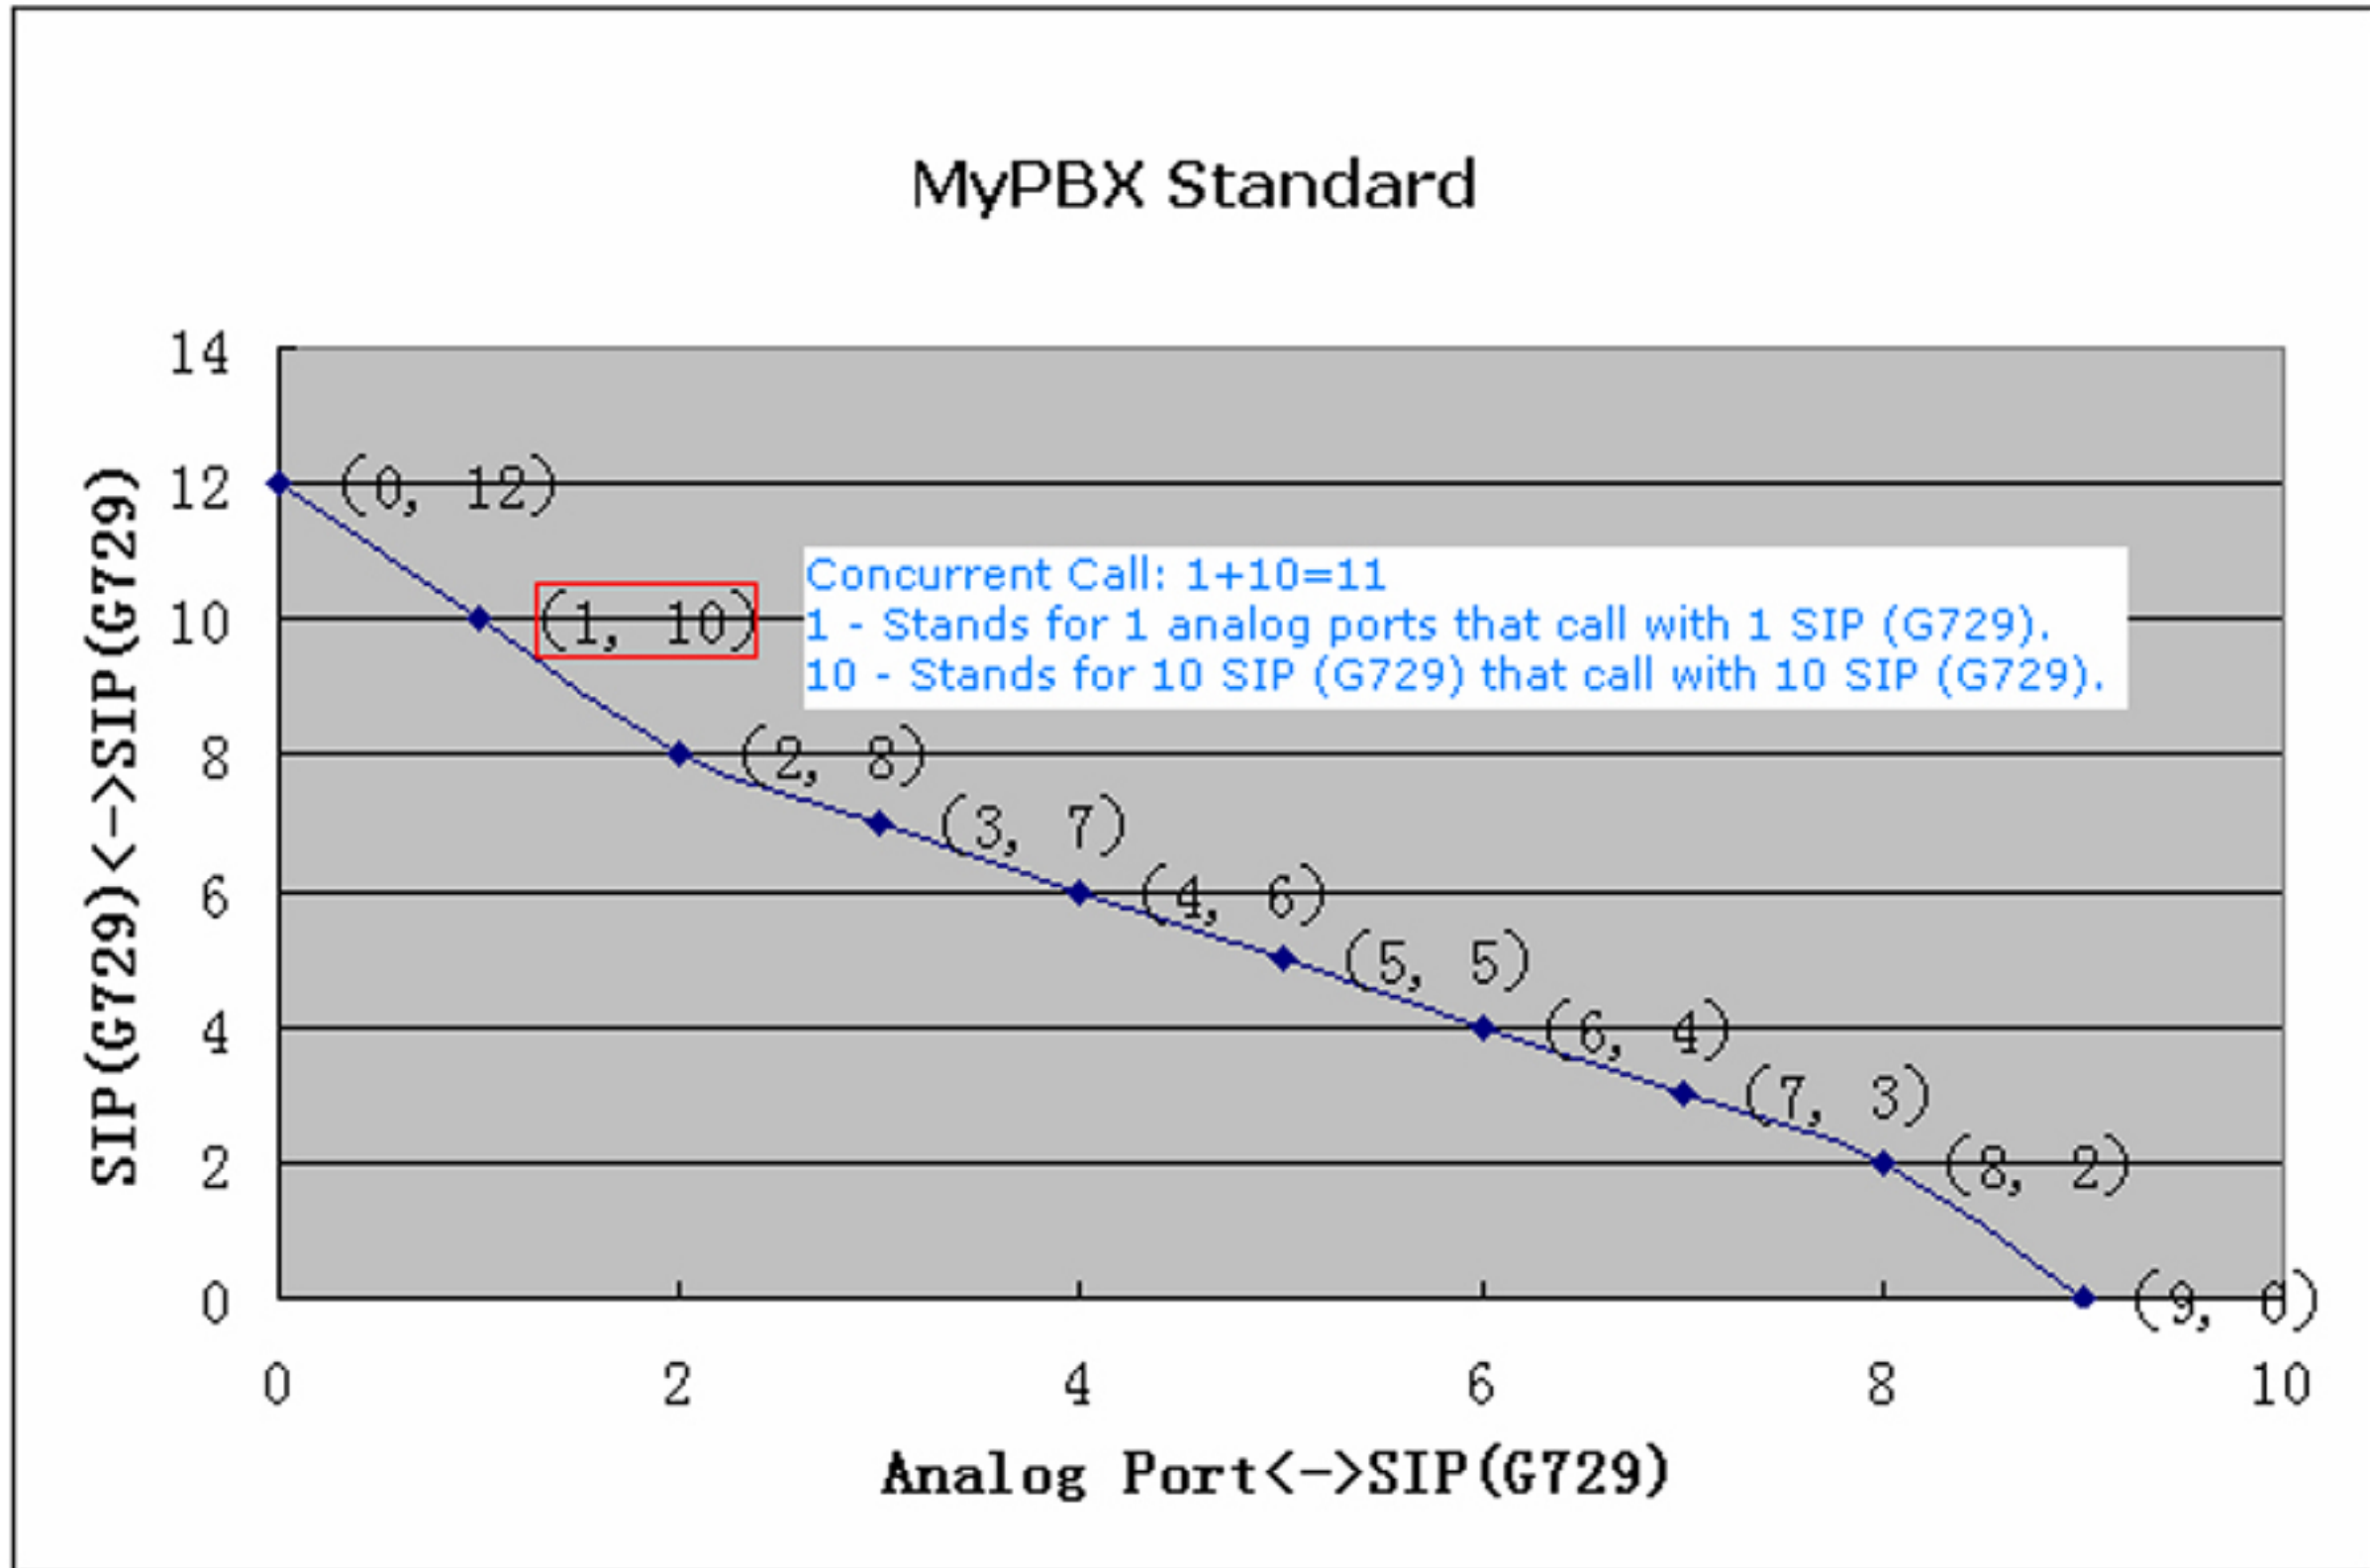


END